



CONCORD

RETAIL SOLUTIONS

FRICON SELF-CONTAINED PLUG & PLAY FREEZERS





TEL: +27 31 462 2323 | SALES@CONCORDREFRIGERATION.CO.ZA | WWW.CONCORDREFRIGERATION.CO.ZA

FRICON SELF-CONTAINED PLUG & PLAY FREEZER

The Fricon Plug-In Freezer is a self-contained energy efficient glass top horizontal freezer that is made in Europe to the highest quality standards on the planet. This plug and play freezer is the future for any retail store wanting to save money on energy while boosting the customer's basket spend, with reduced maintenance costs.

While it is extremely energy efficient and super quiet, it also has the ability to draw the shopper's attention to the products inside it, while keeping your products frozen.


The Fricon Plug-In Freezer can be customised with a choice of colours (white/grey/black), including customised coloured bumpers.

AVAILABLE IN THE FOLLOWING SIZES: 2,500MM & 2,200MM LENGTHS AND 1,940MM CROWN ENDS (SLB RANGE)


2,100MM & 2,100MM CROWN ENDS (CLS RANGE)


Total Energy Consumption:
From 5.7KW hours per day

SLB RANGE

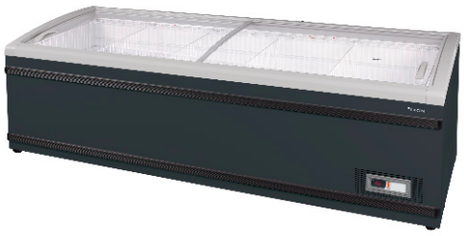


2500mm SLB

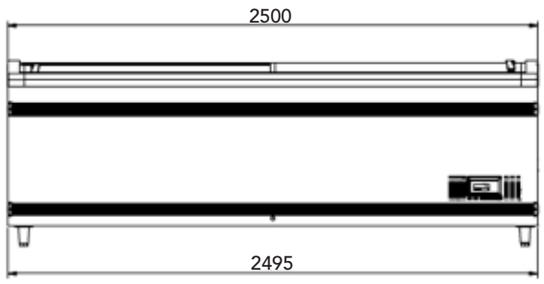


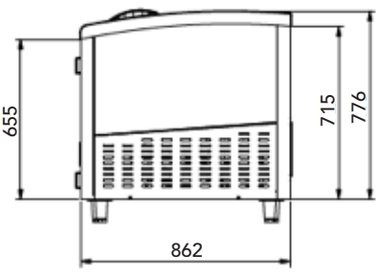

2200mm SLB




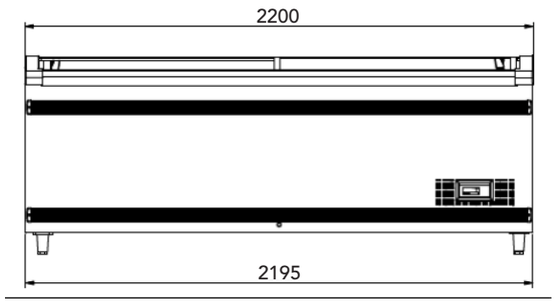


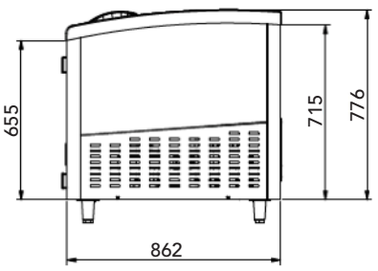

1940mm SLB Crown End



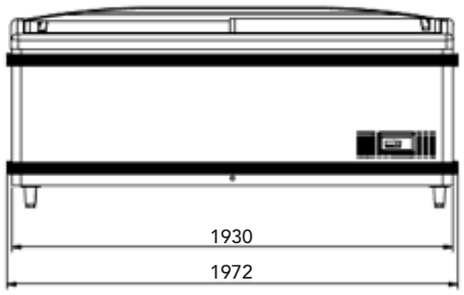

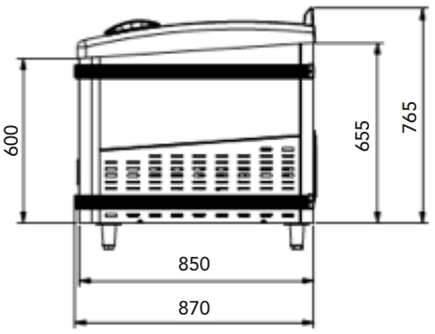



FRICON SELF-CONTAINED PLUG & PLAY FREEZER

CLS RANGE




2100mm CLS Crown End

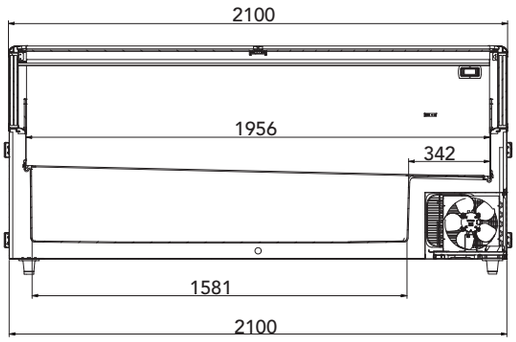


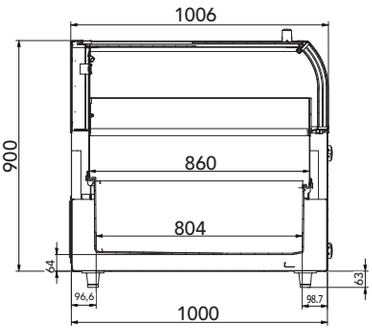

2100mm CLS



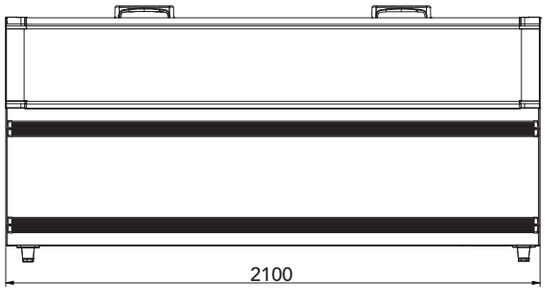



FEATURES:

STANDARD FEATURES	OPTIONAL FEATURES
High display area with merchandising at the visual level of the customer	Variable Speed Drive
LED Lighting empowers and stimulates the visual purchase process	Dual sided LED lighting
Easy, low cost and fast installation (Plug-In)	Environmentally friendly solution using low impact refrigerant (R290)
High performance refrigeration equals preservation of fresh & frozen product	Additional bumpers
Auto defrost	Single or Double Riser Shelves with or without under shelf-lighting
High net volume and product exposure	Corner protectors
Units able to be lined up back to back, or against walls	Floor mounted nudge rails
Galvanised steel	
70mm wall thickness	
Tempered glass	
Internal dividers and baskets	
Water drainage system	
Water trimmer	
Digital thermometer	
Hidden evaporator coil	

SPECIFICATIONS OF SLB RANGE	CABINET LENGTH	WEIGHT (CRATED WEIGHT)	NET CAPACITY	DISPLAY SURFACE	TEMPERATURE RANGE	INSULATION THICKNESS	REFRIGERANT	TOTAL ENERGY CONSUMPTION
	2,500mm	154kg (198kg)	886 Litres	1.56m²	-24˚C to -14˚C	70mm	R290	6.1kWh/24hr
	2,200mm	150kg (193kg)	739 Litres	1.36m²	-24˚C to -14˚C	70mm	R290	5.8kWh/24hr
	1 940mm	129kg (163kg)	574 Litres	1.16m²	-24˚C to -14˚C	70mm	R290	5.7kWh/24hr

SPECIFICATIONS OF CLS RANGE	CABINET LENGTH	WEIGHT (CRATED WEIGHT)	NET CAPACITY	DISPLAY SURFACE	TEMPERATURE RANGE	INSULATION THICKNESS	REFRIGERANT	TOTAL ENERGY CONSUMPTION
	2,100mm	180kg (227kg)	672 Litres	1.65m²	-24˚C to -16˚C	70mm + Glass Sides	R290	6.79kWh/24hr
	2,100mm Crown End	198kg (239kg)	672 Litres	1.66m²	-24˚C to -16˚C	70mm + Glass Sides	R290	8.03kWh/24hr


The above specifications are based on store conditions of 25°C and 60% relative humidity.






OPTIONAL EXTRAS: SINGLE OR DOUBLE RISER SHELVES (WITH OR WITHOUT LED LIGHTS) AND NUDGE RAILS



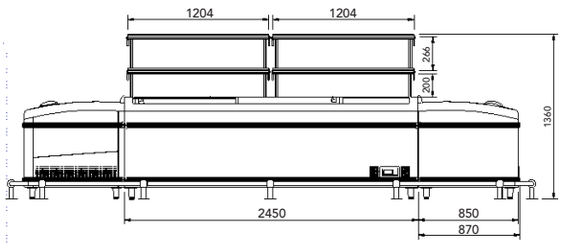



CONFIGURATION OPTIONS


Possible Line-Up Options:




SOLO



ROW

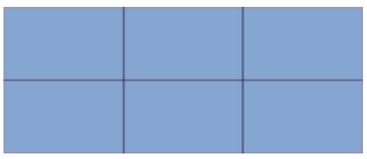

BACK TO BACK

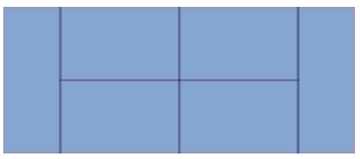

ISLAND









CONCORD

RETAIL SOLUTIONS

www.concordrefrigeration.co.za