


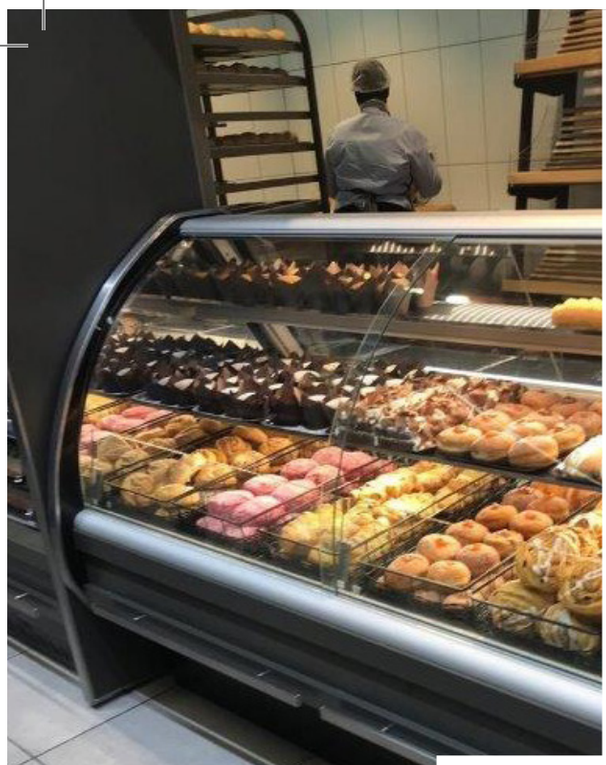

CONCORD

RETAIL SOLUTIONS

CURVED GLASS DELI SERVE OVER CABINET

CHILLER / FREEZER











TEL: +27 31 462 2323 | SALES@CONCORDREFRIGERATION.CO.ZA | WWW.CONCORDREFRIGERATION.CO.ZA

CURVED GLASS DELI SERVE OVER CABINET

CHILLER / FREEZER

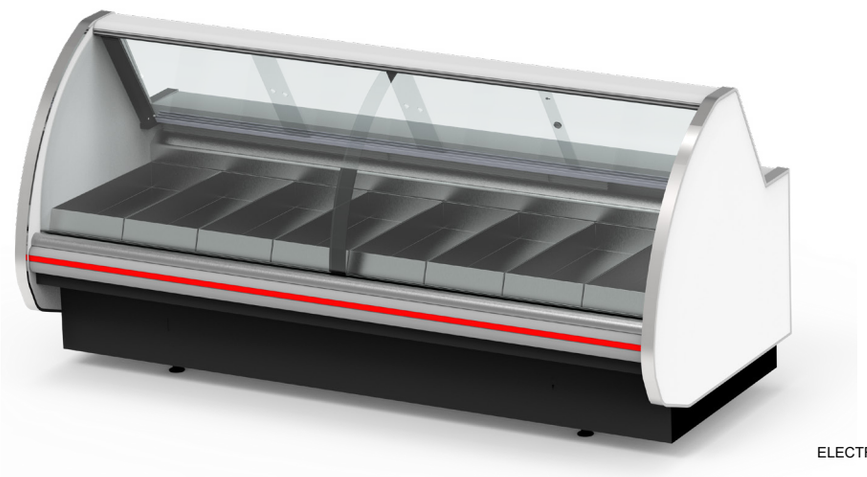

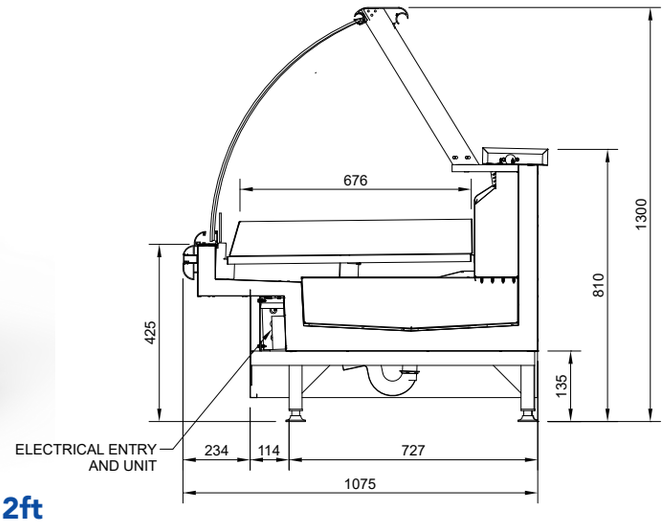


Available in the following lengths: 4ft, 6ft, 8ft,10ft & 12ft

Concord's Curved Glass Deli Serve Over Cabinet can be supplied as a Chiller or a Freezer unit. It can also be supplied as a remote or self-contained unit.

This robust and efficient refrigerated unit is designed to easily draw the shopper's attention to the products inside it and give easy access to the shop assistant, to enable quick and efficient service to the customer.

The Curved Glass Deli Serve Over Cabinet can be customised with a choice of internal and external colours, bumpers, nudge bars and side panels.

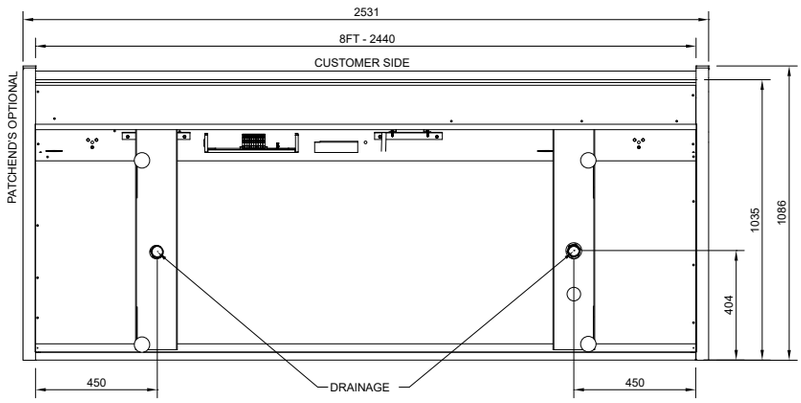

This model is specifically for displaying Chilled and Frozen Goods

STANDARD FEATURES	OPTIONAL FEATURES	
Deck Plates	100mm or 60mm Meat Pans	Intermediate shelf
Perspex Rear Sliders	Glass Patch Ends (half)	Available in a self-contained option
Thermostatic Valves	Electronic Expansion Valves	
2 x NTC Probes	EC Fans	
Shaded Pole Fans	CO2 Coil	
Standard Coil	LED Lights	
Fluorescent Lights	Stainless Steel Nudge Rails	

SPECIFICATIONS		CABINET LENGTH	TOTAL DISPLAY SURFACE AREA	TEMPERATURE RANGE	REFRIGERATION CAPACITY (W)	EVAP TEMPERATURE	ELECTRICAL REQUIREMENTS					
							FANS		HEATERS		LIGHTING	
							SPM FANS	ECM FANS	ANTI-SWEAT	DEFROST	CANOPY (LED)	UNDER SHELF (LED)
	CHILLER	1,220mm (4ft)	1,21m2	0˚C - 4˚C	840	-8˚C	29w	23w	15,6w	600w	36w	NA
		1,830mm (6ft)	1,81m2	0˚C - 4˚C	1460	-8˚C	58w	46w	47,58w	800w	60w	NA
		2,440mm (8ft)	2,41m2	0˚C - 4˚C	1675	-8˚C	58w	46w	58,44w	1000w	84w	NA
		3,660mm (12ft)	3,62m2	0˚C - 4˚C	2500	-6˚C	87w	69w	83,5w	1500w	132w	NA
	FREEZER	1,220mm (4ft)	1,21m2	-22˚C to -24˚C	740	-30˚C	29w	23w	180,5w	1200w	36w	NA
		1,830mm (6ft)	1,81m2	-22˚C to -24˚C	1110	-30˚C	58w	46w	235,2w	1600w	60w	NA
		2,440mm (8ft)	2,41m2	-22˚C to -24˚C	1480	-30˚C	58w	46w	302,4w	2000w	84w	NA
		3,660mm (12ft)	3,62m2	-22˚C to -24˚C	2220	-30˚C	87w	69w	469w	3000w	132w	NA

The above specifications are based on store conditions of 25°C and 60% relative humidity.

